

Technical Data Sheet

DD-13230




Description

- Flexible, loaded silicone magnetic absorber.
- Highly conductive absorber that provides excellent shielding over a wide frequency range.
- Standard Sheet Size:
 - 12" x 12" (30.48 cm x 30.48 cm)
 - Custom sheet sizes available upon request.
- Available with pressure sensitive adhesive (PSA).
- Can be water-jet or die cut for custom configurations.
- Halogen free, RoHS and REACH compliant.

| <u>Properties</u> | <u>Test Method</u> | <u>Value</u> |
|---------------------------|--------------------|--|
| Durometer | ASTM D2240 | 67 Shore A |
| Tensile Strength | ASTM D638 | 250 psi |
| Elongation | ASTM D638 | 381% |
| Surface Resistivity | ASTM D257 | 4.2 Ω/\square |
| Max Operating Temperature | -- | 375°F (190°C) |
| Flammability Rating | -- | UL94 V-0 |
| Standard Sheet Thickness | -- | 0.045" (1.143 mm) Other thicknesses available upon request. |
| Color | -- | Gray |

Insertion Loss

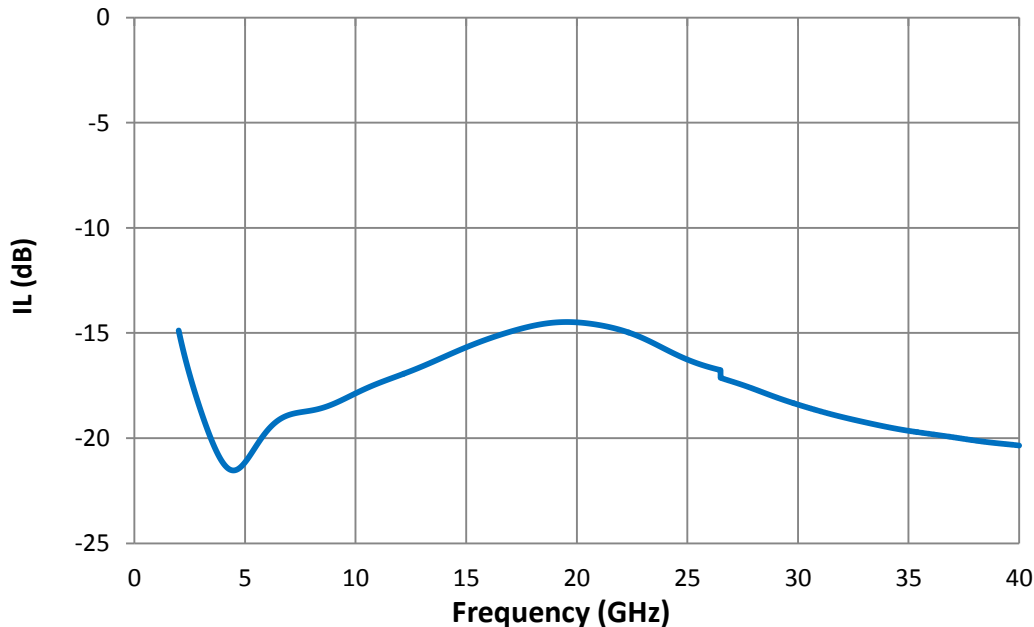

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.