

Technical Data Sheet

FS-11649




Description


- Flexible, loaded fluorosilicone magnetic absorber.
- Tuned for mode suppression in an enclosed cavity, signal isolation, and surface current attenuation.
- Available with pressure sensitive adhesive (PSA).
- Standard sheet size:
 - 12" x 12" (30.48 cm x 30.48 cm).
 - Custom sheet sizes available upon request.
- Can be water-jet or die cut for custom configurations.
- RoHS and REACH compliant.

<u>Properties</u>	<u>Test Method</u>	<u>Value</u>
Durometer	ASTM D2240	55 Shore A
Tensile Strength	ASTM D638	283 psi
Elongation	ASTM D638	207%
Surface Resistivity	ASTM D257	11 GΩ/□
Standard Sheet Thickness	--	0.060" (1.574 mm) Other thicknesses available upon request.
Color	--	Gray

Attenuation

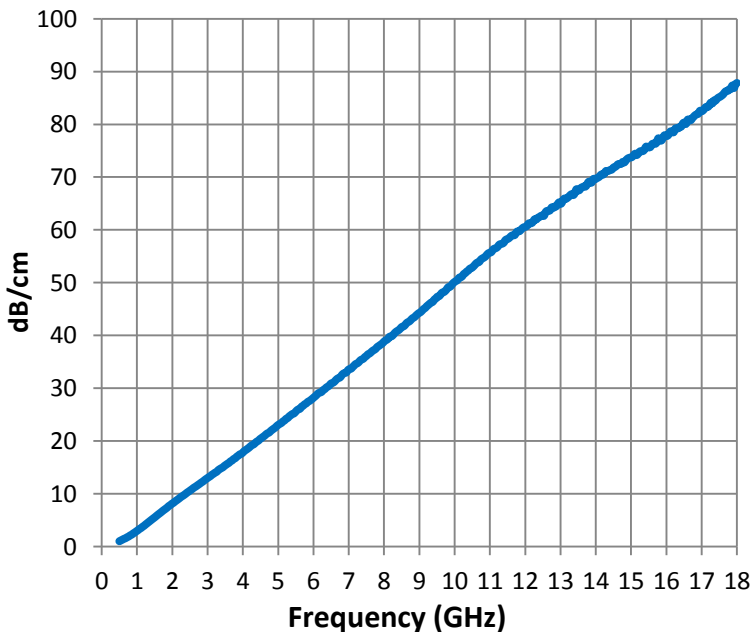

Reflection Loss

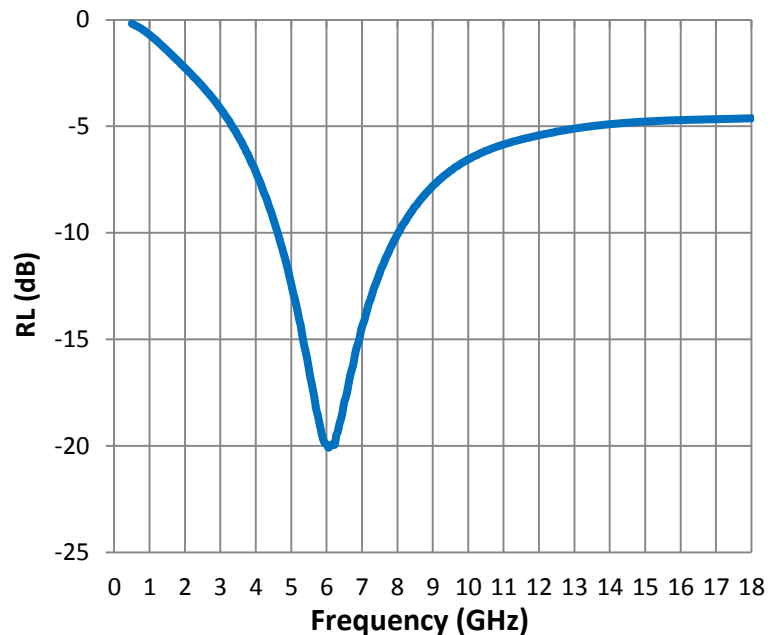

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.