

# Technical Data Sheet

## LS-10290



### Description

- Flexible, low density, high loss, carbon impregnated foam dielectric absorber.
- Ideal for applications requiring absorption across a wide range of frequencies, including antenna cross-talk and side lobe reduction and cavity resonance suppression.
- Comes with pressure sensitive adhesive (PSA) applied.
- Can be water-jet for custom configurations.
- RoHS and REACH compliant.


### Physical Properties

<u>Properties</u>	<u>Value</u>
Sheet Thickness	0.25" (6.35 mm)
Standard Sheet Size	24" x 24" (60.96 cm x 60.96 cm)
Color	Black

### Electrical Properties

<u>Frequency</u>	<u>Typical Insertion Loss</u>
10 GHz	13 dB ( $\pm 2.5$ dB)

### Insertion Loss

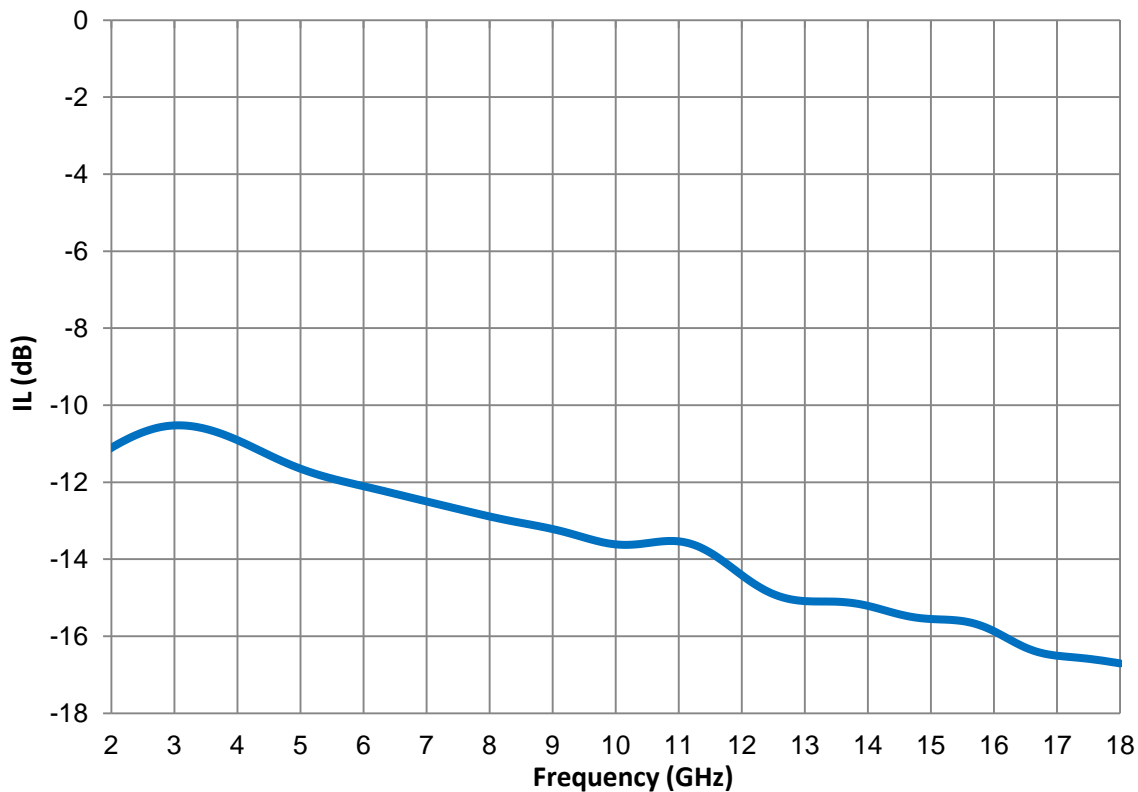

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.