

# Technical Data Sheet

## RT-10448



### Description

- Flexible, low density, high loss, carbon impregnated reticulated foam.
- Available with PSA, surface coating, or ground plane.
- Can be water-jet cut for custom configurations.
- RoHS and REACH compliant.


### Physical Properties

<u>Properties</u>	<u>Value</u>
Sheet Thickness	2.0" (50.8 mm)
Standard Sheet Size	24" x 24" (60.96 x 60.96 cm) Other sheet sizes are available upon request.
Color	Black

### Electrical Properties

<u>Frequency</u>	<u>Typical Reflection Loss</u>
8 – 18 GHz	≤ -20 dB

Reflection Loss of RT-10448

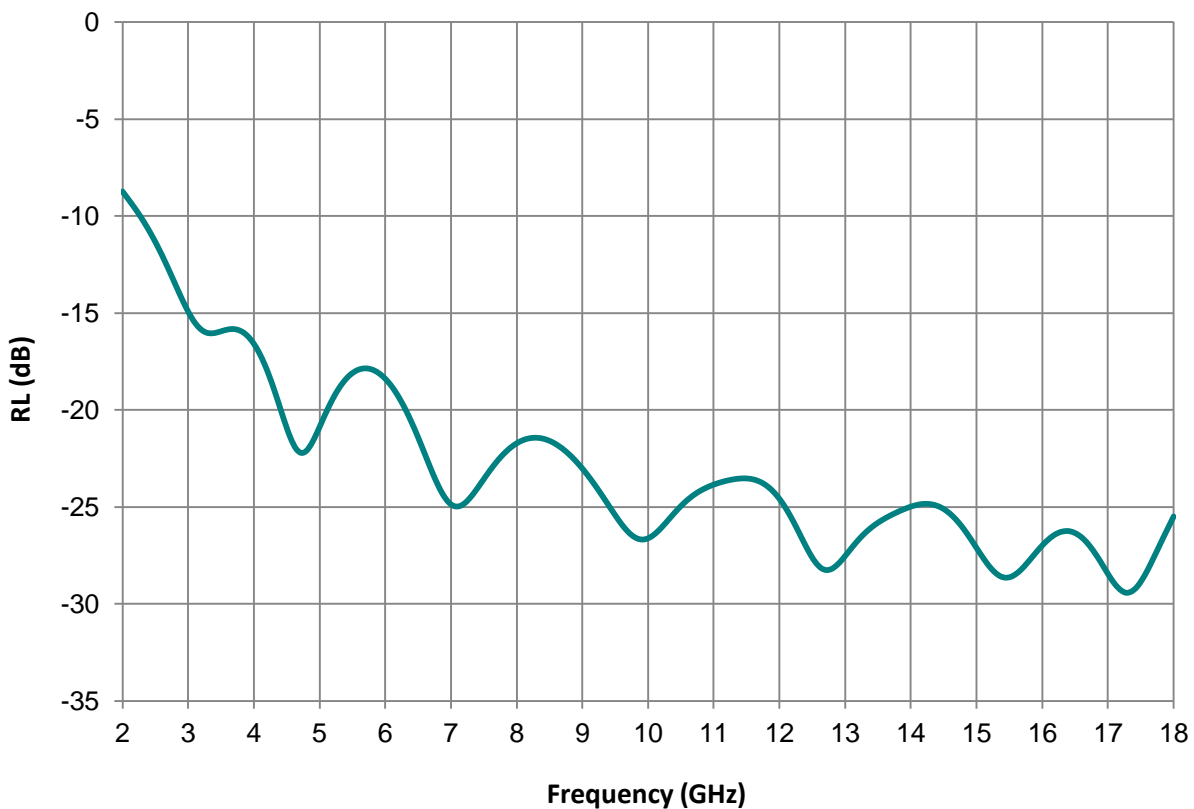

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.