

Technical Data Sheet

RT-11421



Description

- Flexible, low density, high loss, carbon impregnated reticulated foam.
- Available with PSA, surface coating, or ground plane.
- Can be water-jet cut for custom configurations.
- RoHS and REACH compliant.


Physical Properties

<u>Properties</u>	<u>Value</u>
Sheet Thickness	0.50" (12.7 mm)
Standard Sheet Size	24" x 48" (60.96 cm x 121.92 cm)
	Others available upon request.
Color	Black


Electrical Properties

<u>Frequency</u>	<u>Typical Reflection Loss</u>
8-18 GHz	-12 dB

Insertion Loss

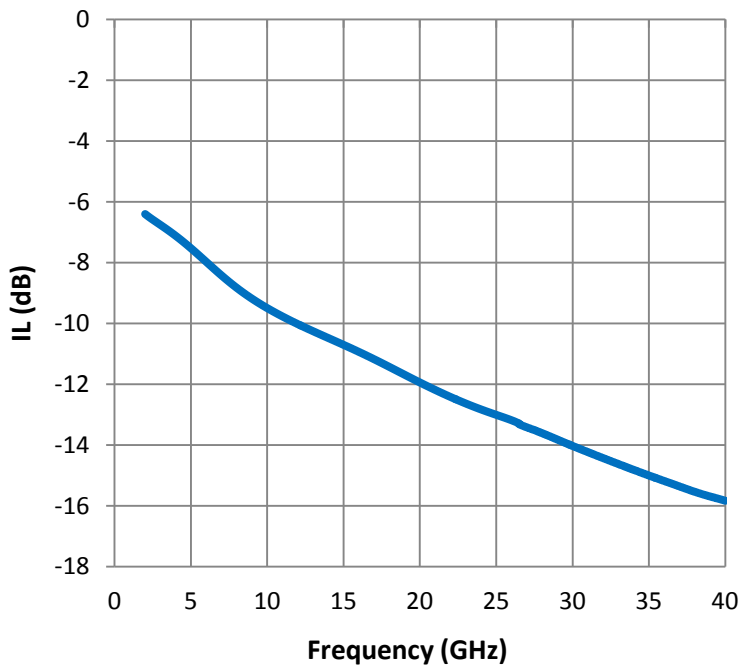

Reflection Loss

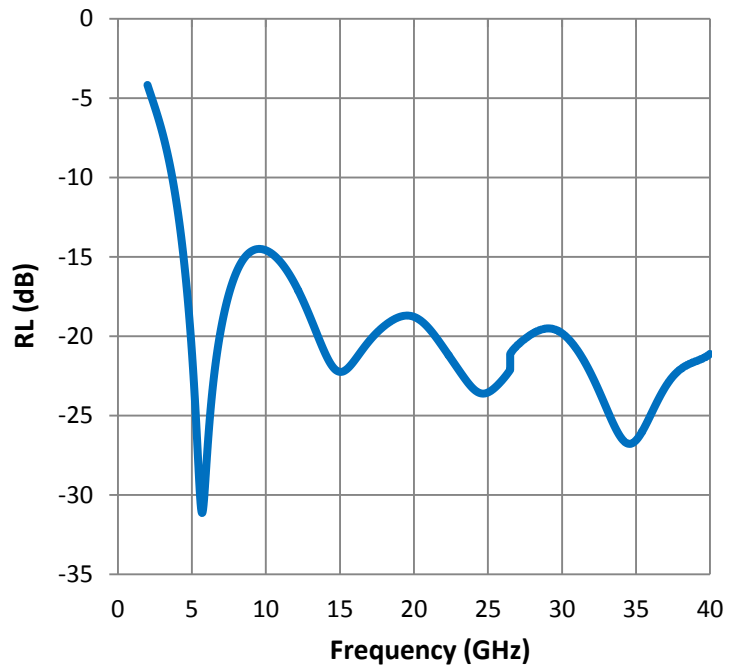

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.