

Technical Data Sheet


SB6001



Description

- Lightweight, flexible, low dielectric material.
- Improved impedance matching with air.
- Available with pressure sensitive adhesive (PSA).
- Can be water-jet or die cut for custom configurations.
- Halogen free, RoHS, and REACH compliant.

Properties	Test Method	Value
Durometer	ASTM D2240-03	77 Shore A
Tensile Strength	ASTM D638-02A	604 psi
Elongation	ASTM D638-02A	1120%
Surface Resistivity	ASTM D257	>11 GΩ/□
Color		Tinted Gray

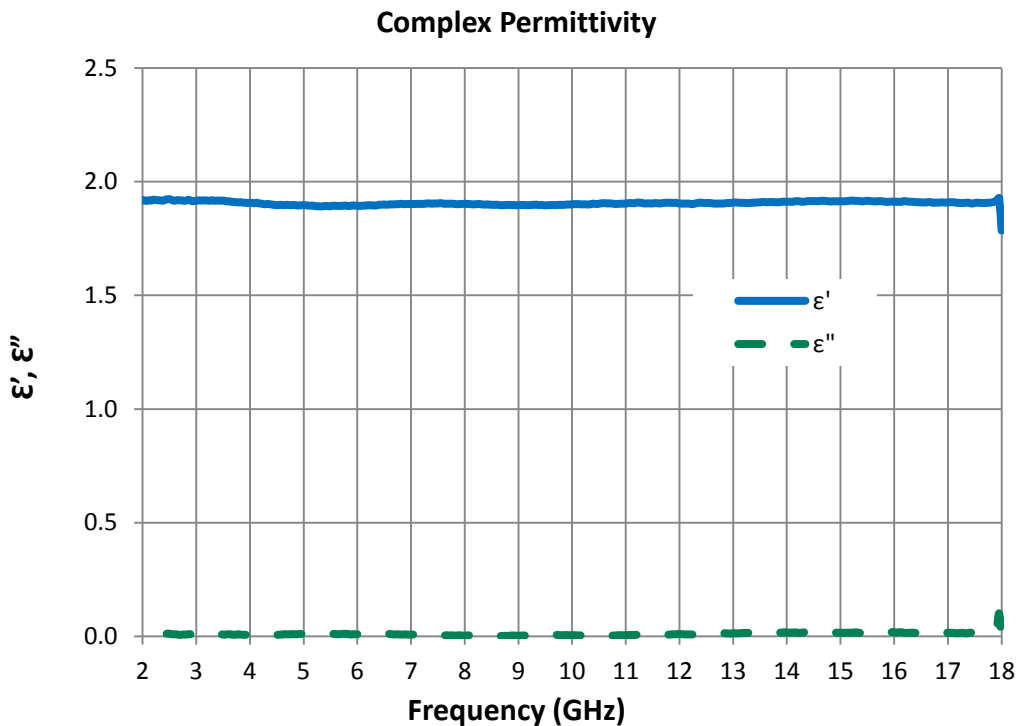

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application.