

# Technical Data Sheet

## UD-14520




### Description


- Flexible, broadband, loaded, urethane, rubber magnetic absorber.
- Tuned for mode suppression in an enclosed cavity, signal isolation and surface current attenuation
- Standard Sheet Size:
  - 24" x 24" (60.96 cm x 60.96 cm)
  - Custom sheet sizes available upon request.
- Available with pressure sensitive adhesive (PSA).
- Can be water-jet or die cut for custom configurations.
- Halogen free, RoHS and REACH compliant.

<u>Properties</u>	<u>Test Method</u>	<u>Value</u>
Durometer	ASTM D2240	60 Shore A
Tensile Strength	ASTM D638	838 psi
Elongation	ASTM D638	803%
Surface Resistivity	ASTM D257	> 11 GΩ/□
Max Operating Temperature	--	275°F (135°C)
Flammability Rating	--	UL94 HB
Standard Sheet Thickness	--	0.043" (1.09 mm) Other thicknesses available upon request.
Color	--	Gray

### Attenuation

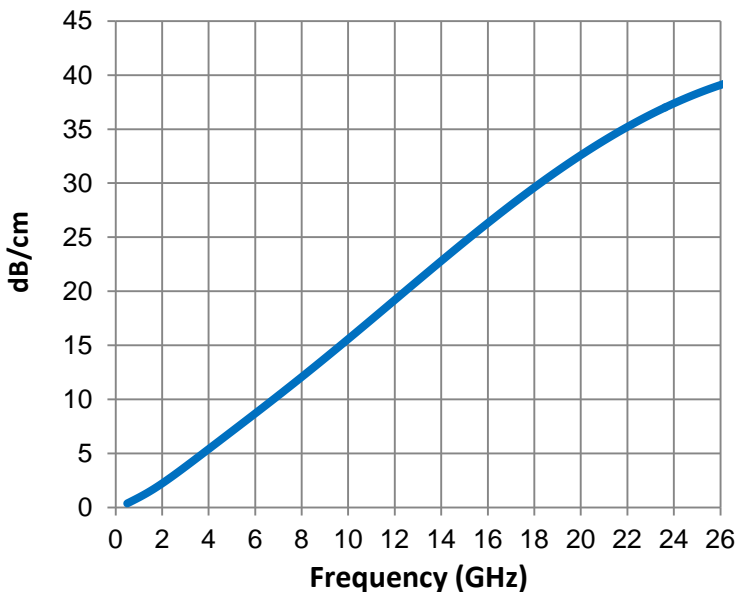

### Reflection Loss

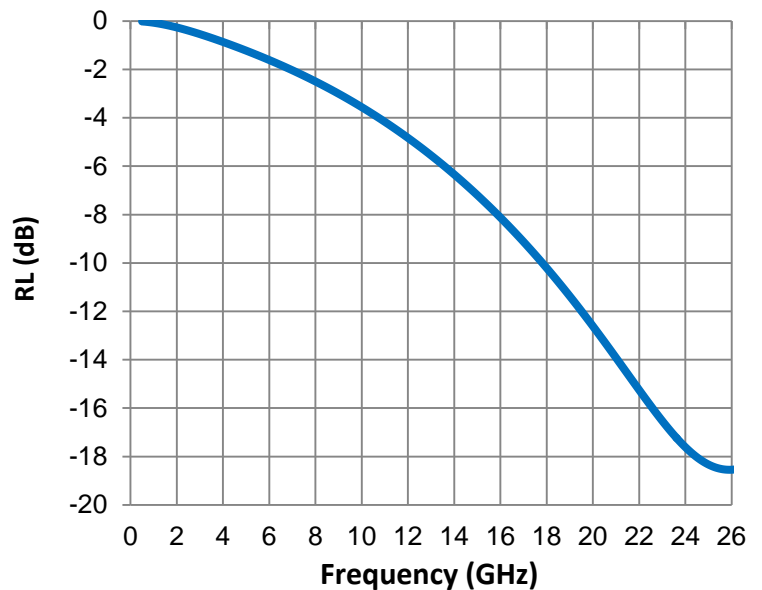

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.