

# Technical Data Sheet

## WX-E6000 Series




### Description


- WX-E6000 series absorber offers very high permeability and provides superior EMI absorption over wide frequency range.
- Designed to be placed close to noise sources.
- Suitable for near-field applications requiring maximum absorption.
- Available with pressure sensitive adhesive (PSA).
- Can be water-jet or die cut for custom configurations.
- Halogen free, RoHS and REACH compliant.

Properties	Test Method	Value
Durometer	ASTM D2240	60 Shore D
Tensile Strength	ASTM D638	7520 psi
Elongation	ASTM D638	8.3%
Surface Resistivity	ASTM D257	310 GΩ/□
Standard Sheet Thickness	--	0.004" (0.1 mm) 0.008" (0.2 mm) 0.012" (0.3 mm) 0.016" (0.4 mm)
Standard Sheet Size	--	8.26" x 11.69" (210 mm x 297 mm)
Color	--	Gray

Measured Complex Permeability

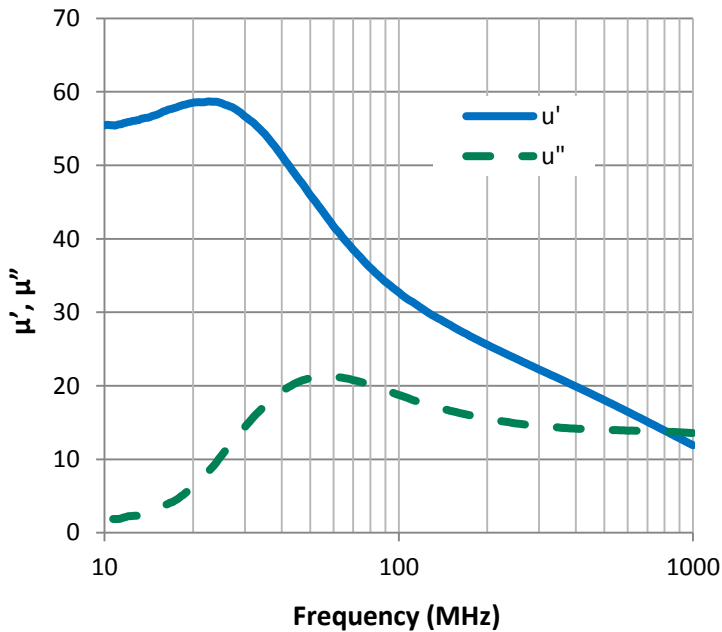

Measured Magnetic Loss Tangent

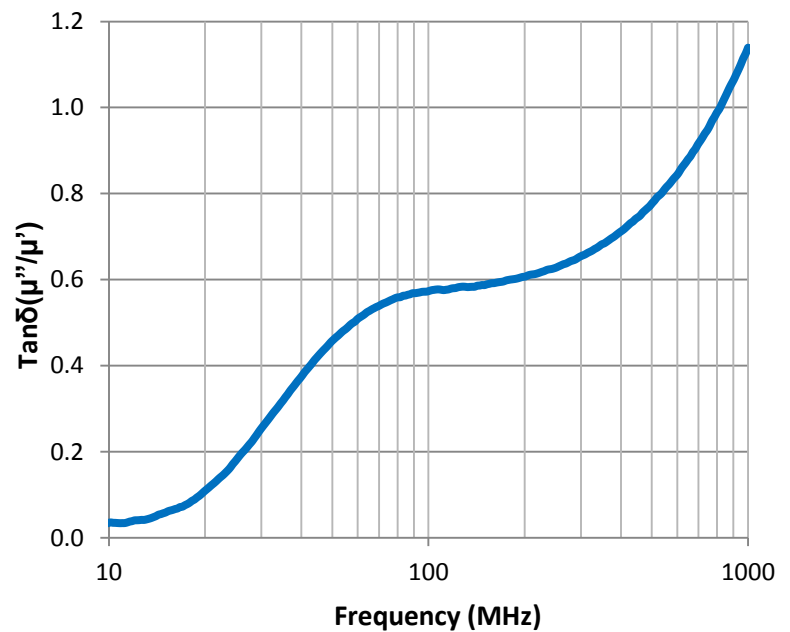

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.